

5565 S-Trees

A Strange Tree (S-tree) over the variable set $X_n = \{x_1, x_2, \dots, x_n\}$ is a binary tree representing a Boolean function $f : \{0, 1\}^n \rightarrow \{0, 1\}$. Each path of the S-tree begins at the *root* node and consists of $n + 1$ nodes. Each of the S-tree's nodes has a *depth*, which is the amount of nodes between itself and the root (so the root has depth 0). The nodes with depth less than n are called *non-terminal* nodes. All non-terminal nodes have two children: the *right child* and the *left child*. Each non-terminal node is marked with some variable x_i from the variable set X_n . All non-terminal nodes with the same depth are marked with the same variable, and non-terminal nodes with different depth are marked with different variables. So, there is a unique variable x_{i_1} corresponding to the root, a unique variable x_{i_2} corresponding to the nodes with depth 1, and so on. The sequence of the variables $x_{i_1}, x_{i_2}, \dots, x_{i_n}$ is called the *variable ordering*. The nodes having depth n are called *terminal* nodes. They have no children and are marked with either 0 or 1. Note that the variable ordering and the distribution of 0's and 1's on terminal nodes are sufficient to completely describe an S-tree.

As stated earlier, each S-tree represents a Boolean function f . If you have an S-tree and values for the variables x_1, x_2, \dots, x_n , then it is quite simple to find out what $f(x_1, x_2, \dots, x_n)$ is: start with the root. Now repeat the following: if the node you are at is labelled with a variable x_i , then depending on whether the value of the variable is 1 or 0, you go its right or left child, respectively. Once you reach a terminal node, its label gives the value of the function.

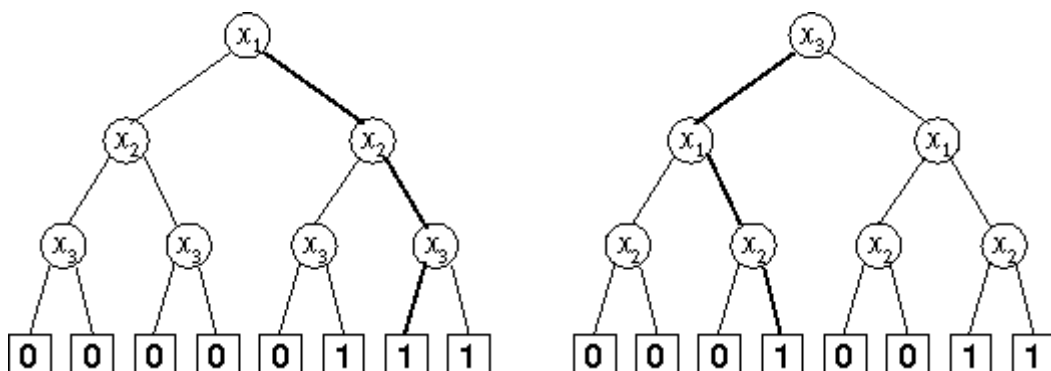


Figure 1: S-trees for the function $x_1 \wedge (x_2 \vee x_3)$

On the picture, two S-trees representing the same Boolean function, $f(x_1, x_2, x_3) = x_1 \wedge (x_2 \vee x_3)$, are shown. For the left tree, the variable ordering is x_1, x_2, x_3 , and for the right tree it is x_3, x_1, x_2 .

The values of the variables x_1, x_2, \dots, x_n , are given as a *Variable Values Assignment* (VVA)

$$(x_1 = b_1, x_2 = b_2, \dots, x_n = b_n)$$

with $b_1, b_2, \dots, b_n \in \{0, 1\}$. For instance, $(x_1 = 1, x_2 = 1, x_3 = 0)$ would be a valid VVA for $n = 3$, resulting for the sample function above in the value $f(1, 1, 0) = 1 \wedge (1 \vee 0) = 1$. The corresponding paths are shown bold in the picture.

Your task is to write a program which takes an S-tree and some VVAs and computes $f(x_1, x_2, \dots, x_n)$ as described above.

Input

The input file contains the description of several S-trees with associated VVAs which you have to process. Each description begins with a line containing a single integer n , $1 \leq n \leq 7$, the depth of the

S-tree. This is followed by a line describing the variable ordering of the S-tree. The format of that line is $x_{i_1} x_{i_2} \dots x_{i_n}$. (There will be exactly n different space-separated strings). So, for $n = 3$ and the variable ordering x_3, x_1, x_2 , this line would look as follows:

```
x3 x1 x2
```

In the next line the distribution of 0's and 1's over the terminal nodes is given. There will be exactly 2^n characters (each of which can be '0' or '1'), followed by the new-line character. The characters are given in the order in which they appear in the S-tree, the first character corresponds to the leftmost terminal node of the S-tree, the last one to its rightmost terminal node.

The next line contains a single integer m , the number of VVAs, followed by m lines describing them. Each of the m lines contains exactly n characters (each of which can be '0' or '1'), followed by a new-line character. Regardless of the variable ordering of the S-tree, the first character always describes the value of x_1 , the second character describes the value of x_2 , and so on. So, the line

```
110
```

corresponds to the VVA ($x_1 = 1, x_2 = 1, x_3 = 0$).

The input is terminated by a test case starting with $n = 0$. This test case should not be processed.

Output

For each S-tree, output the line 'S-Tree #j:', where j is the number of the S-tree. Then print a line that contains the value of $f(x_1, x_2, \dots, x_n)$ for each of the given m VVAs, where f is the function defined by the S-tree.

Output a blank line after each test case.

Sample Input

```
3
x1 x2 x3
00000111
4
000
010
111
110
3
x3 x1 x2
00010011
4
000
010
111
110
0
```

Sample Output

```
S-Tree #1:
0011

S-Tree #2:
0011
```